



INSTALLATION INSTRUCTIONS

6MM PENTANGLE HINGE DOOR

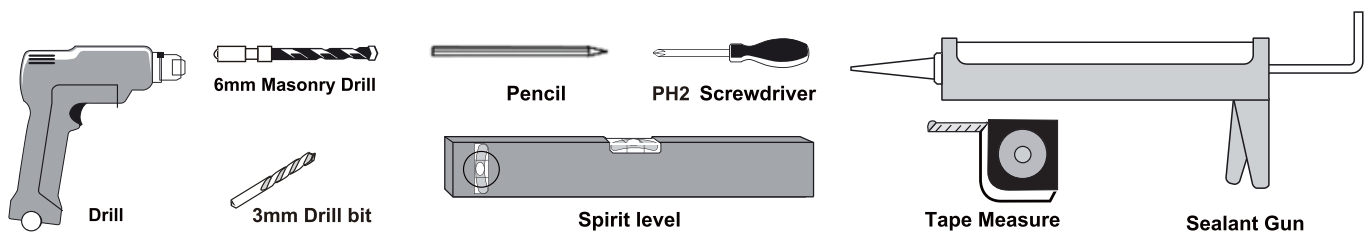

Tools Required (not supplied)

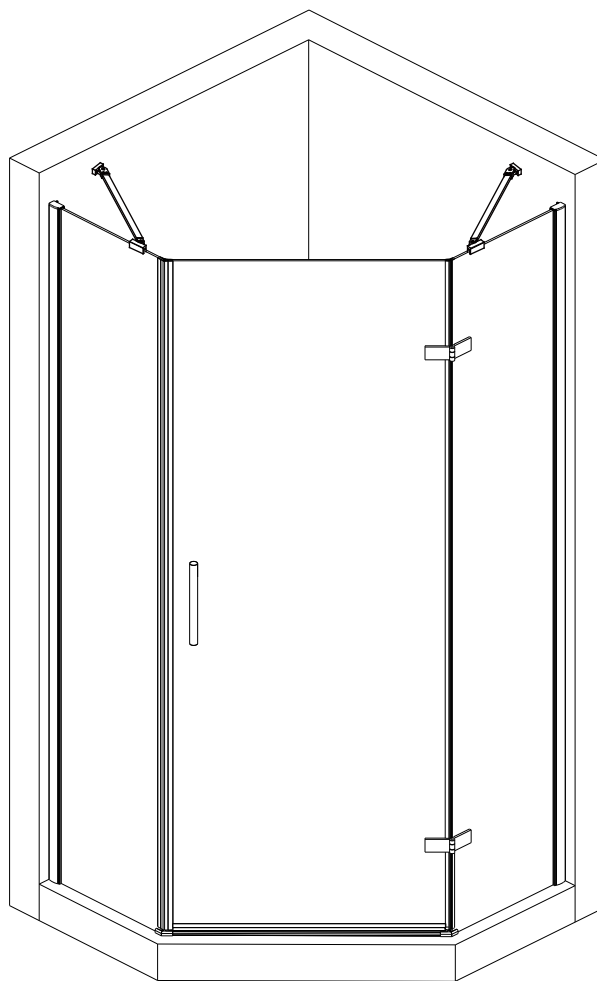

Important Safety/Assembly Instructions


This product should be installed by a suitably qualified and proficient person. The fitting instructions should be followed carefully to ensure a proper and safe installation. Failure to follow these instructions could result in future injury.







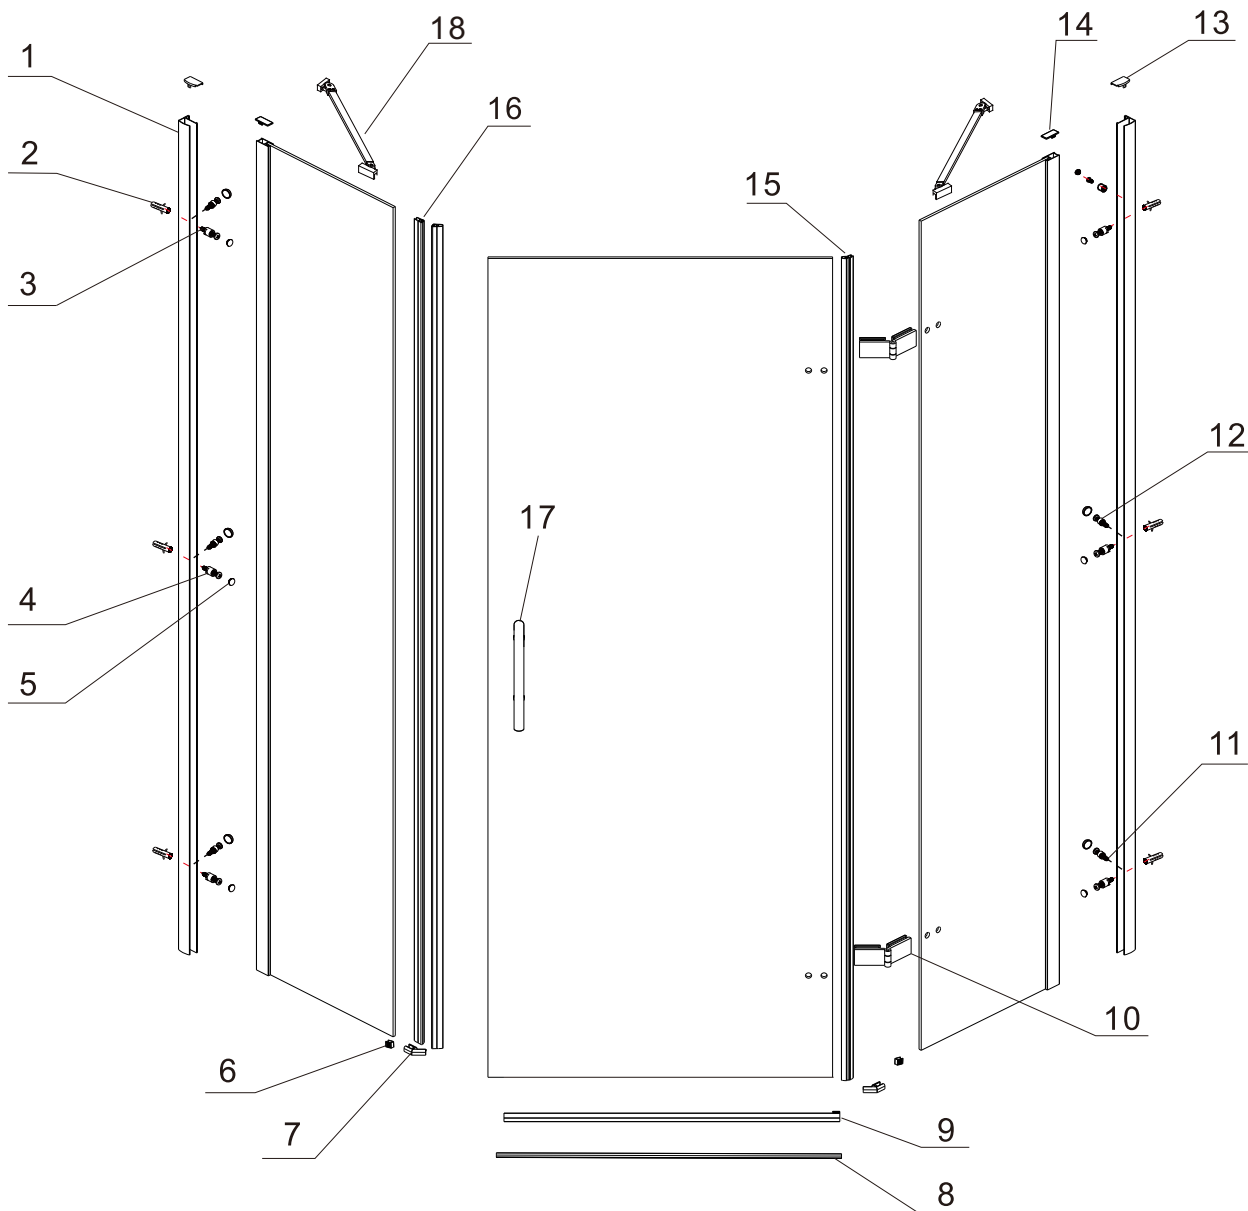


These instructions and list of parts assume that installation is done against solid/tiled walls.










Please check this product for damage prior to starting the installation. No claims can be made after the product has been fitted.

PLEASE NOTE : The minimum and maximum adjustment sizes noted on the product brochures are based on perfectly plumb walls and trays.

A




Item	Description	Image	Qty
1	Wall Profile		2
2	Wall Plug		10
3	Screw M3.5x30		10
4	Screw Cup B		6
5	Screw Cover Cap		12
6	Gasket for 135° End Cap		2
7	135 Degree End Cap		2
8	Bottom Drip Strip		1
9	Bottom Seal		1

Item	Description	Image	Qty
10	Wall Profile		2
11	Screw M4x10		6
12	Screw Cup A		6
13	Wall Profile Top Cap-LH/RH		2
14	Vertical Profile Top Cap		1
15	Vertical Seal		1
16	Magnetic Seal		2
17	Handle		1
18	Support Bar Pack		1

B.1 Place the wall profiles onto the enclosure. Position the enclosure onto the tray. Ideally the enclosure should be positioned 20mm from the edge of the tray as shown. Centralize the enclosure onto the tray top rim and position vertically plumb using a spirit level.

(B)



Screw cup for wall profile


4

12


Screw cup for the door frame

Skip the item 4 & 12 if your door is supplied with cover strips.


Note: There are two different screw cups in the fitting kit. One is for the wall profile, the other one is for the door frame.




B.2




B.3




(C)




(D)




(E)

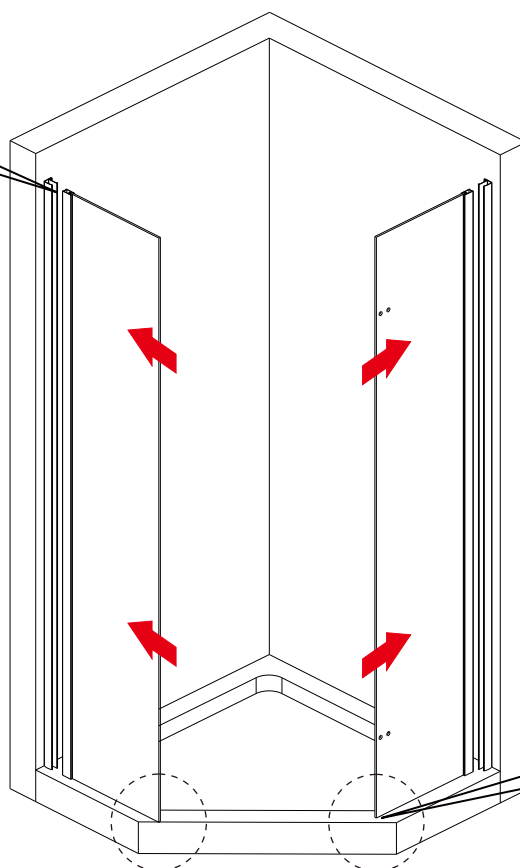


(F)





F.1




F.2



F.3

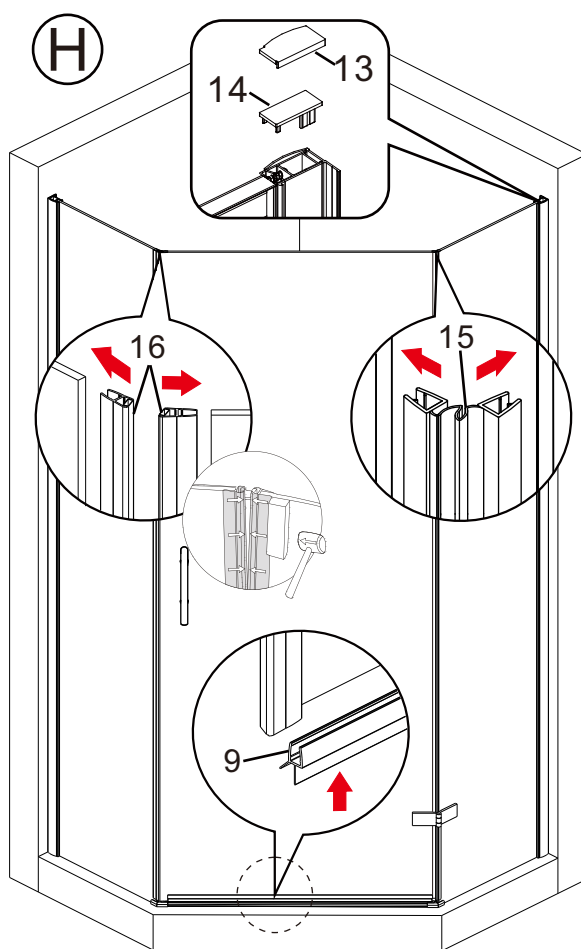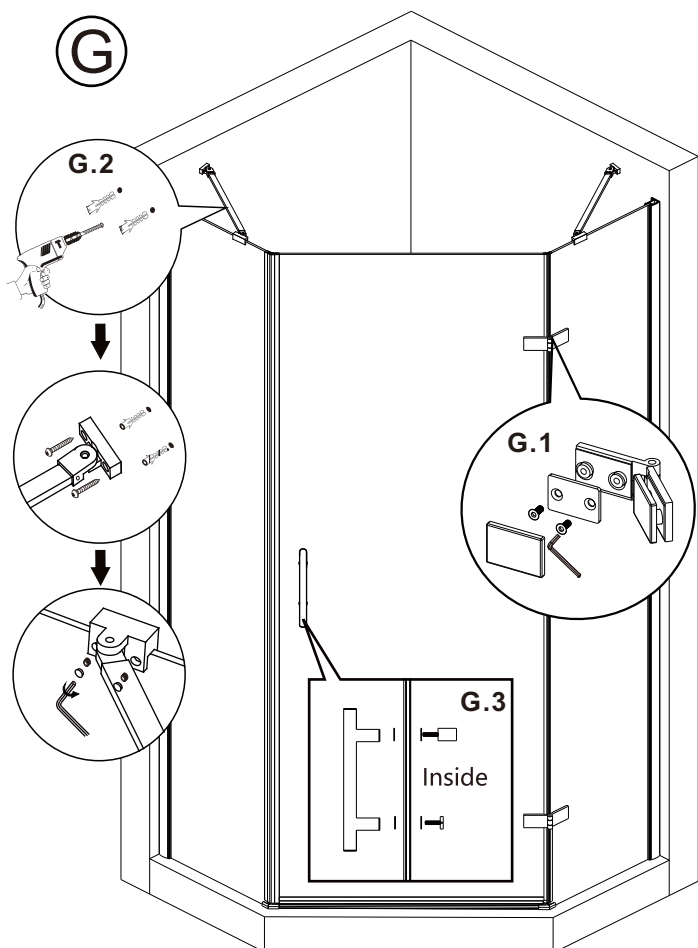

Tips - In cold weather the seal may be more difficult to fit. In this case it is advisable to warm the seal in some warm soapy water to make it more pliable.

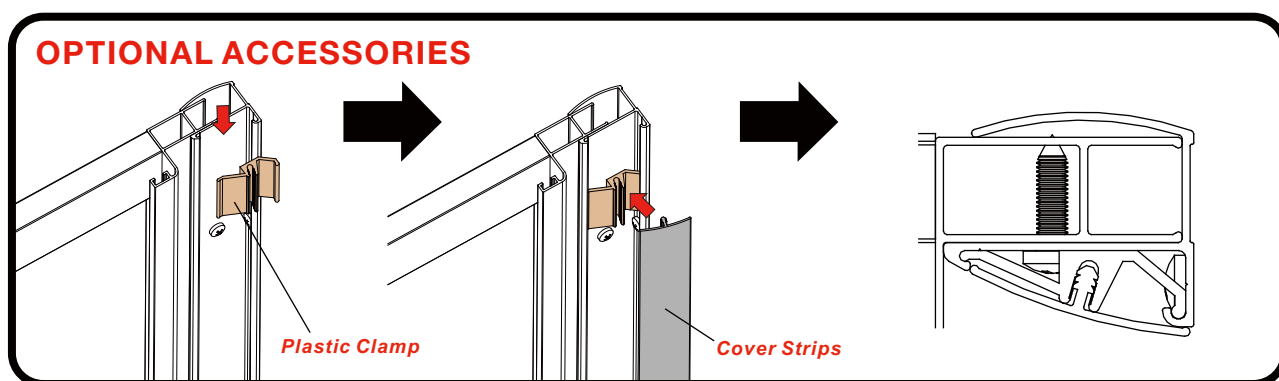


Applying Silicone Sealant

Sealing Inside

Seal from the top of the wall profile to the bottom on the **INSIDE** between the wall profile and the wall.
IMPORTANT: Do not apply sealant on inside of tray.

Sealing Outside

Seal only along the bottom rail and glass on the **OUTSIDE** between the profile /glass and the tray. Also up between the wall profile and the wall.
 Seal also the joints between the bottom profile and any upright profiles.

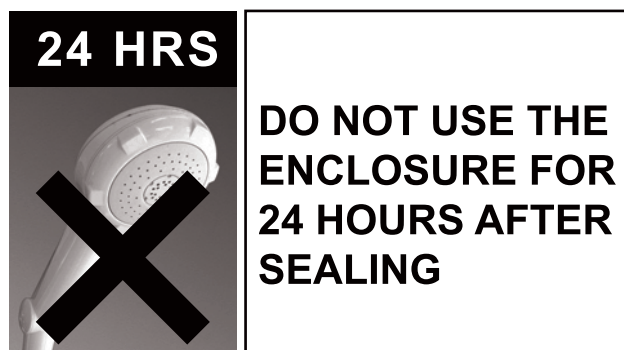

24 HRS

**DO NOT USE THE
ENCLOSURE FOR
24 HOURS AFTER
SEALING**